



Series 1000 & 2000
Metal Interlocking Hose

TECHNICAL INFORMATION

PROJECT: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 SALES ENGINEER: _____
 DATE: _____

www.monoxivent.com

info@monoxivent.com

309-794-1000

Page: HS-1


FLOPPY TYPE

METAL INTERLOCK HOSE

All DSP-Monoxivent metal interlock hose is specially designed and manufactured to meet the demands of a user friendly product. Our metal hose offers a unique floppy type interlock construction so the hose will move and bend extremely easy for the user and yet maintain minimum leakage, while being an unpacked hose. We offer the floppy construction as a standard feature for both the stainless and galvanized hose. This ensures our customer complete satisfaction in the user friendly construction of our products.

SERIES 1000: Constructed of 302 Stainless Steel
 Strip Thickness: .010 - .015 (Depending on Diameter)
 Floppy Interlock Construction
 Temperature Rating: -60 to -1800 Degrees
 Unpacked

SERIES 2000: Constructed of Electro Galvanized Carbon Steel
 Strip Thickness: .010 - .015 (Depending on Diameter)
 Floppy Interlock Construction
 Temperature Rating: 450-500 Degrees F
 Unpacked

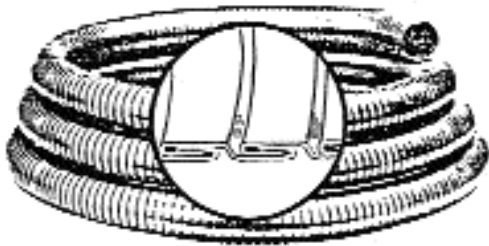

Note: The DSP-Monoxivent metal interlock hose has the same pressure loss performance as standard smooth bore hard duct. Please see hard duct charts within this section, thank you.