


D-SERIES BLOWER

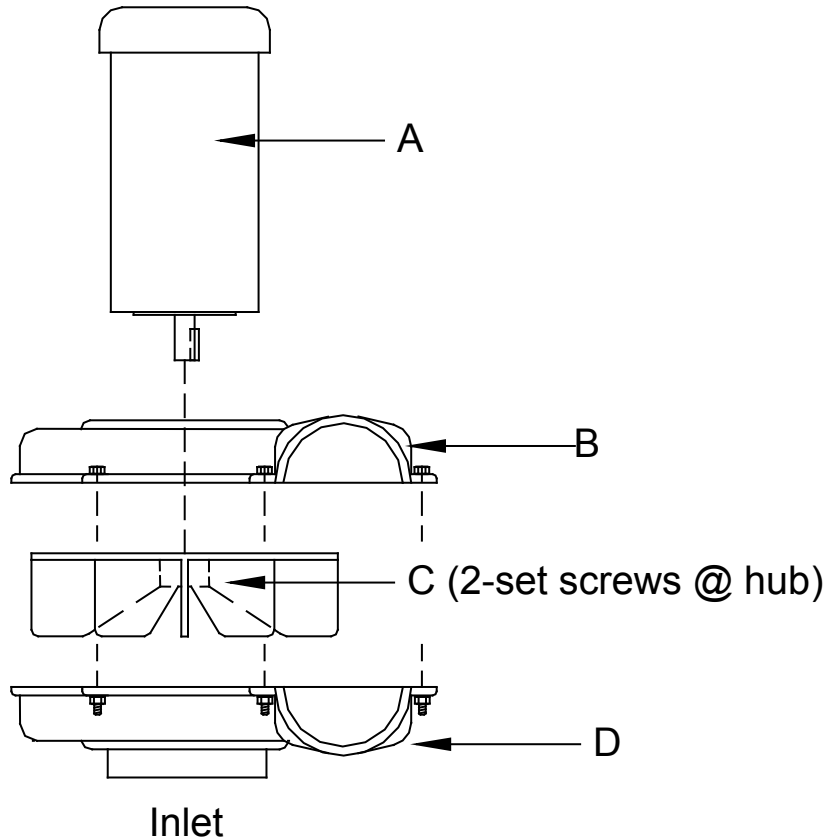

- A** UL/CSA Approved TEFC Motor - 3450 RPM
- B** Top Housing Constructed of Cast Aluminum
- C** Radial Wheel Constructed of Cast Aluminum
- D** Bottom Housing Constructed of Cast Aluminum

** The D Series Blower is a versatile exhauster, constructed of aluminum. The blower is available in several combinations - see below:*

- D05 1/2-HP, Using a 10.5" Wheel (Small Housing)
- D10 1-HP, Using a 12" Wheel (Large Housing)
- D15 1 1/2-HP, Using a 12" Wheel (Large Housing)
- D20 2-HP, Using a 13.5" Wheel (Large Housing)
- D30 3-HP, Using a 13.5" Wheel (Large Housing)

1 Phase: 115/208/230 Volt
3 Phase: 208/230/460 Volt

** The D Series Blower may be supplied with or without a mounting bracket. The blower shown (above) displays the motor, housing, and wheel only. (Housings and wheels are available, less motors)*